



CENTER OF TEE BRANCH
TO BE PLACED IN UPPER
THIRD OF MAIN.

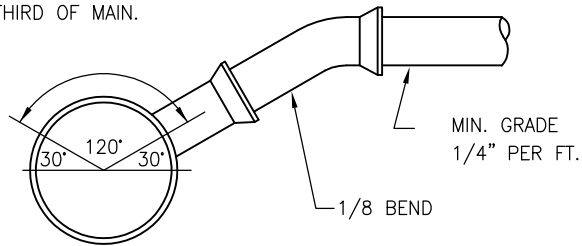


1/8 BEND CONNECTION TO TEE


CENTER OF TEE BRANCH
TO BE PLACED IN UPPER
THIRD OF MAIN.

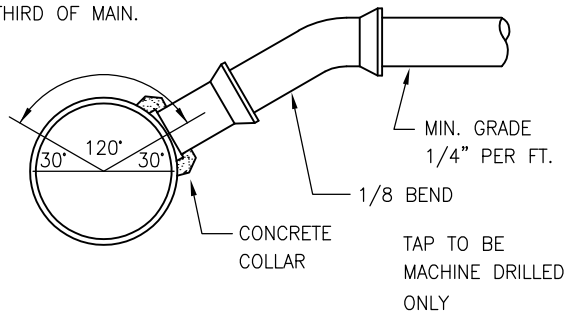

1/8 BEND & SADDLE CONNECTION

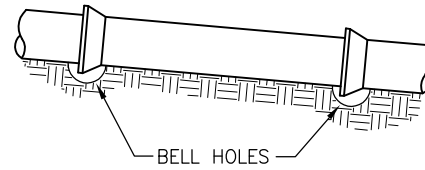


ACCEPTABLE BEDDING

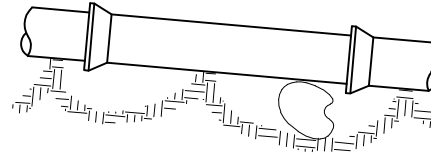

UNACCEPTABLE BEDDING

NOTES:

1. BELLS SHALL NOT TOUCH THE SIDES OR BOTTOM OF THE BELL HOLE.
2. THE BARREL SECTION SHALL BE SUPPORTED THROUGHOUT ITS LENGTH.
3. SERVICE TAPS SHALL BE IN-LINE TEE OR MACHINE TAPPED. HAND TAPS SHALL NOT BE ALLOWED.
4. SERVICE LINES SHALL BE LOCATED 5' DOWNHILL FROM CENTERLINE OF THE LOT AND A MINIMUM OF 10' FROM THE WATER SERVICE LINE.
5. THE MIN. SERVICE LINE GRADE SHALL BE 1/4" PER FT.
6. JOINTS SHALL BE WATER TIGHT.
7. WHEN SERVICE STUB-INS ARE INSTALLED WITH THE SEWER MAIN, THEY SHALL BE EXTENDED AT LEAST TO PROPERTY LINE AND SHALL BE PLUGGED WITH A 2x4 MARKER FOR LOCATION OF END.

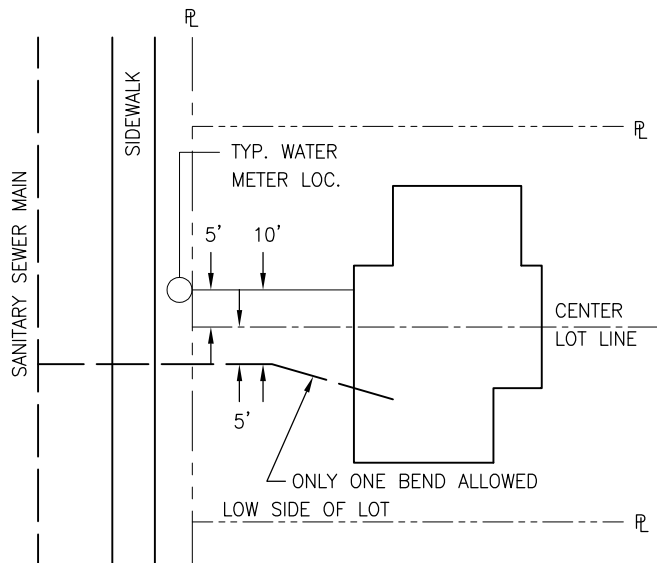

SEWER SERVICE



STANDARDS &
SPECIFICATIONS

REVISED:

**SANITARY SEWER
SERVICE**

DATE:

DRAWING NO. 300-13